


L20/LG/NR

PVCCON 2R-RX/14 B30 00/LG AS

KA2BL3008

TECHNICAL INFORMATION

| | IMPERIAL | METRIC |
|--|---|---|
| Max Production Width | 118.11in | 3000mm |
| Total Thickness | 0.12in | 3mm |
| Mass | 0.66lb/ft ² | 3.2kg/m ² |
| Tensile force at 1% elongation (static) | 80lb/in Internal Method - ref. ISO 21181 | 14N/mm |
| Working Temp. | +14/+158F ^o | -10/+70C ^o |
| Flexion (A) | 1.38in 35mm |  |
| Counter Flexion (B) | 1.97in 50mm | |

COEFFICIENT OF FRICTION (bottom side) - **Steel** 0.24

BEST USED FOR

GENERAL CHARACTERISTICS

2 ply black PVC, longitudinal groove top cover. Whisper fabric on bottom. Antistatic.


RECOMMENDED USES

Slider Bed | Flat Rollers | Incline Conveying | Incline Variation | Slide Bed with Pressure

SPECIAL CHARACTERISTICS

- ✓ **Antistatic**
ISO 284 & 21178
- ✓ **Low Noise**

BELT CONSTRUCTION INFORMATION

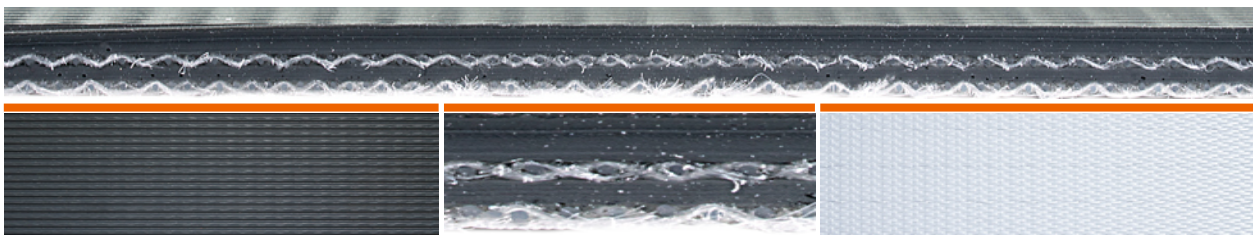

| TOP SIDE (Carrying) | | TENSION MEMBER | | BOTTOM SIDE (Pulley) | |
|----------------------------|--------------------------|-----------------|---------------------------------|----------------------------|-------------|
| Material | PVC | Interply | PVC | Material | Fabric |
| Color | Black (B) | Weft | Rigid (R) | Color | Fabric (FA) |
| Thickness | 0.04in 1.1mm | Plies | 2 | Thickness | 0in 0mm |
| Hardness ISO 868 | 46 Shore A | Fabric | Rigid - Rigid Whisper (R-RX) | Hardness ISO 868 | - |
| Surface | Longitudinal Groove (LG) | | | Surface | Bare (00) |

*Because of continuous development above data is subjected to change without prior notice by Sampla. This data replaces that included in previous publications. Sampla excludes any liability for the incorrect use of the above stated information.

RELEASED 01/01/2019