




F20/M

PVCEXCON 2R/12 W57 U0/M FA

KB2WH5701

TECHNICAL INFORMATION

	IMPERIAL	METRIC
Max Production Width	118.11in	3000mm
Total Thickness	0.22in	5.7mm
Mass	0.96lb/ft ²	4.7kg/m ²
Tensile force at 1% elongation (static)	68lb/in Internal Method - ref. ISO 21181	12N/mm
Working Temp.	+14/+158F ^o	-10/+70C ^o
Flexion (A)	1.97in 50mm	
Counter Flexion (B)	2.36in 60mm	

COEFFICIENT OF FRICTION (bottom side) - **Steel** 0.2

BEST USED FOR

GENERAL CHARACTERISTICS

2 ply white PVC rough top Food approved


RECOMMENDED USES

Slider Bed | Flat Rollers | Incline Conveying |
 Incline Variation | Slide Bed with Pressure

SPECIAL CHARACTERISTICS

- ✓ **Food Approved, FDA compliance**
acc.to 21 CFR parts 170-19
- ✓ **Food Approved, EU compliance**
(EC) No. 1935/2004 & (EU) No. 10/2011
- ✓ **Oil & Fat Resistant**

BELT CONSTRUCTION INFORMATION

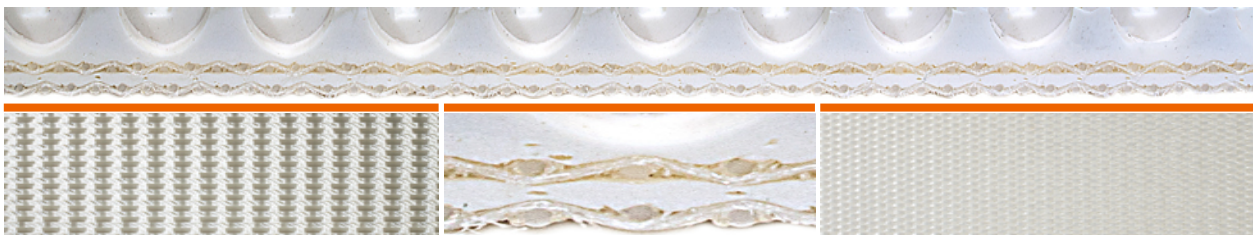

TOP SIDE (Carrying)		TENSION MEMBER		BOTTOM SIDE (Pulley)	
Material	PVC	Interply	PVC	Material	Fabric
Color	White (W)	Weft	Rigid (R)	Color	Fabric (FA)
Thickness	0.15in 3.9mm	Plies	2	Thickness	0in 0mm
Hardness ISO 868	60 Shore A	Fabric	Rigid (R)	Hardness ISO 868	-
Surface	Rough Top (M)			Surface	PU Impregnated (U0)

*Because of continuous development above data is subjected to change without prior notice by Sampla. This data replaces that included in previous publications. Sampla excludes any liability for the incorrect use of the above stated information.

RELEASED 01/01/2019