

SAMPLA CONVEYOR BELTS DATA SHEET



T20/L

PVCCON 2F-FX/12 B25 00/L AS

KA2BL2504

TECHNICAL INFORMATION

	IMPERIAL	METRIC
Max Production Width	62.99in	1600mm
Total Thickness	0.1in	2.5mm
Mass	0.53lb/ft ²	2.6kg/m ²
Tensile force at	68lbf/in	12N/mm
1 [%] elongation (static)	Internal Method - ref. ISO 21181	
Working Temp.	+14/+158F°	-10/+70C°
Flexion (A)	1.97in 50mm	A
Counter Flexion (B)	2.76in 70mm	B)

BEST USED FOR

GENERAL CHARACTERISTICS

2 ply black PVC sandblast top. Whisper fabric. Antistatic

RECOMMENDED USES


Slider Bed | Flat Rollers | Incline Conveying | Incline Variation | Slide Bed with Pressure

SPECIAL CHARACTERISTICS

COEFFICIENT OF FRICTION (bottom side) - Steel



BELT CONSTRUCTION INFORMATION

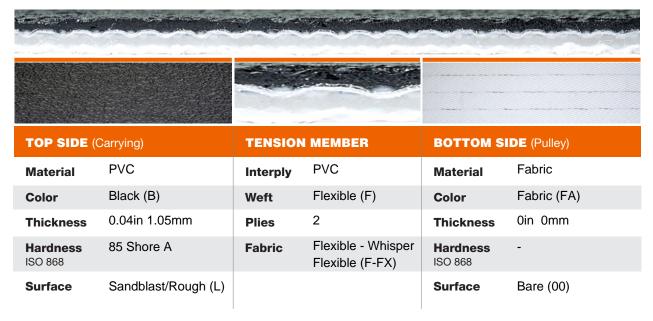

0.24

^{*}Because of continuous development above data is subjected to change without prior notice by Sampla. This data replaces that included in previous publications. Sampla excludes any liability for the incorrect use of the above stated information.

RELEASED 01/01/2019

