


**T8/L**

**PVCCON 1RX/6 B16 00/L AS**

**KA1BL1602**

**TECHNICAL INFORMATION**

	IMPERIAL	METRIC
<b>Max Production Width</b>	94.49in	2400mm
<b>Total Thickness</b>	0.06in	1.6mm
<b>Mass</b>	0.33lb/ft <sup>2</sup>	1.6kg/m <sup>2</sup>
<b>Tensile force at 1% elongation (static)</b>	34lb/in Internal Method - ref. ISO 21181	6N/mm
<b>Working Temp.</b>	+14/+158F <sup>o</sup>	-10/+70C <sup>o</sup>
<b>Flexion (A)</b>	0.79in 20mm	
<b>Counter Flexion (B)</b>	1.57in 40mm	

**COEFFICIENT OF FRICTION** (bottom side) - **Steel** 0.24

**BEST USED FOR**

**GENERAL CHARACTERISTICS**

2 ply black PVC, sandblast top. Whisper fabric. Antistatic


**RECOMMENDED USES**

Slider Bed | Flat Rollers | Incline Conveying | Incline Variation | Slide Bed with Pressure

**SPECIAL CHARACTERISTICS**

- ✓ **Antistatic**  
ISO 284 & 21178
- ✓ **Low Noise**

**BELT CONSTRUCTION INFORMATION**

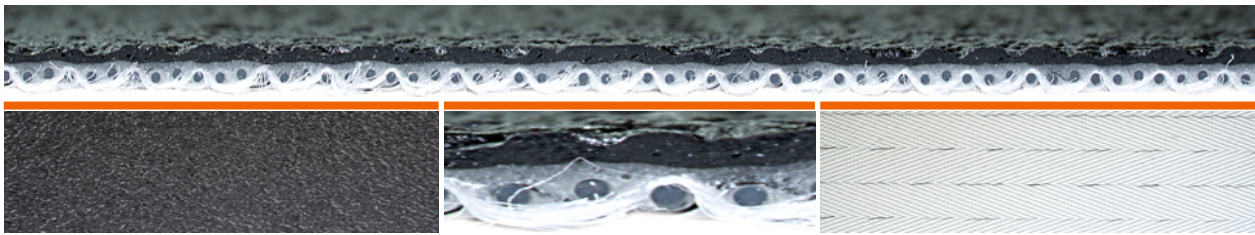

<b>TOP SIDE</b> (Carrying)		<b>TENSION MEMBER</b>	<b>BOTTOM SIDE</b> (Pulley)		
<b>Material</b>	PVC	<b>Interply</b>	-	<b>Material</b>	Fabric
<b>Color</b>	Black (B)	<b>Weft</b>	Rigid (R)	<b>Color</b>	Fabric (FA)
<b>Thickness</b>	0.02in 0.6mm	<b>Plies</b>	1	<b>Thickness</b>	0in 0mm
<b>Hardness</b> ISO 868	85 Shore A	<b>Fabric</b>	Rigid Whisper (RX)	<b>Hardness</b> ISO 868	-
<b>Surface</b>	Sandblast/Rough (L)			<b>Surface</b>	Bare (00)

\*Because of continuous development above data is subjected to change without prior notice by Sampla. This data replaces that included in previous publications. Sampla excludes any liability for the incorrect use of the above stated information.

RELEASED 01/01/2019

