


**DN8/A/AS**

**PVCCON 2R/10 B20 00/V05A AS**

**KA2BL2001**

**TECHNICAL INFORMATION**

	IMPERIAL	METRIC
<b>Max Production Width</b>	118.11in	3000mm
<b>Total Thickness</b>	0.08in	2mm
<b>Mass</b>	0.53lb/ft <sup>2</sup>	2.6kg/m <sup>2</sup>
<b>Tensile force at 1% elongation (static)</b>	57lb/in	10N/mm
	Internal Method - ref. ISO 21181	
<b>Working Temp.</b>	+14/+158F <sup>o</sup>	-10/+70C <sup>o</sup>
<b>Flexion (A)</b>	1.57in 40mm	
<b>Counter Flexion (B)</b>	2.36in 60mm	

**COEFFICIENT OF FRICTION** (bottom side) - **Steel** 0.24

**BEST USED FOR**

Supermarket Checkout, Accumulation Belt, General Industry Applications

**GENERAL CHARACTERISTICS**

2 ply black PVC antistatic.


**RECOMMENDED USES**

Slider Bed | Flat Rollers | Slider Beds on Both Sides | Conveyor with Accumulation | Slide Bed with Pressure

**SPECIAL CHARACTERISTICS**

- ✓ **Antistatic**  
 ISO 284 & 21178

**BELT CONSTRUCTION INFORMATION**

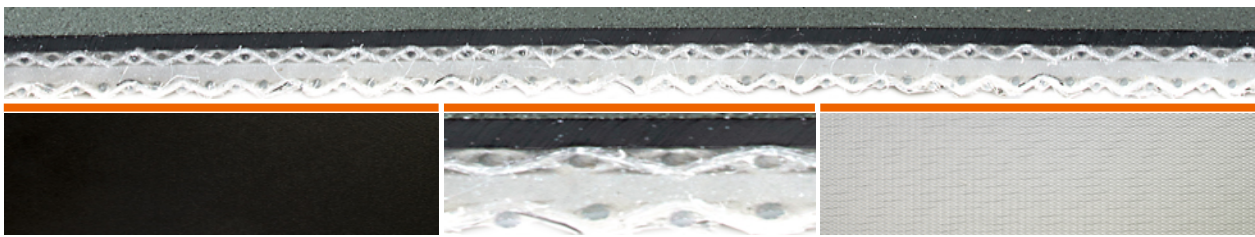

<b>TOP SIDE (Carrying)</b>		<b>TENSION MEMBER</b>		<b>BOTTOM SIDE (Pulley)</b>	
<b>Material</b>	PVC	<b>Interply</b>	PVC	<b>Material</b>	Fabric
<b>Color</b>	Black (B)	<b>Weft</b>	Rigid (R)	<b>Color</b>	Fabric (FA)
<b>Thickness</b>	0.02in 0.5mm	<b>Plies</b>	2	<b>Thickness</b>	0in 0mm
<b>Hardness</b> ISO 868	90 Shore A	<b>Fabric</b>	Rigid (R)	<b>Hardness</b> ISO 868	-
<b>Surface</b>	Matte Finish (A)			<b>Surface</b>	Bare (00)

\*Because of continuous development above data is subjected to change without prior notice by Sampla. This data replaces that included in previous publications. Sampla excludes any liability for the incorrect use of the above stated information.

RELEASED 01/01/2019