


L30/AS

PVCCON 3R/16 PG60 00/V30 AS

KA3PG6001

TECHNICAL INFORMATION

	IMPERIAL	METRIC
Max Production Width	118.11in	3000mm
Total Thickness	0.24in	6mm
Mass	1.62lb/ft ²	7.9kg/m ²
Tensile force at 1% elongation (static)	91lb/in	16N/mm
	Internal Method - ref. ISO 21181	
Working Temp.	+14/+158F ^o	-10/+70C ^o
Flexion (A)	5.91in 150mm	
Counter Flexion (B)	7.09in 180mm	

COEFFICIENT OF FRICTION (bottom side) - **Steel** 0.24

BEST USED FOR

GENERAL CHARACTERISTICS

3 ply soft green PVC 6mm thick.


RECOMMENDED USES

Slider Bed | Flat Rollers | Incline Conveying | Slide Bed with Pressure

SPECIAL CHARACTERISTICS

- ✓ **Antistatic**
ISO 284 & 21178

BELT CONSTRUCTION INFORMATION

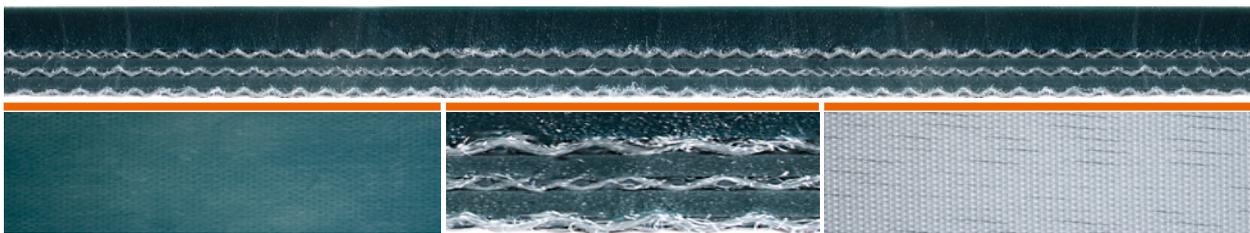

TOP SIDE (Carrying)		TENSION MEMBER		BOTTOM SIDE (Pulley)	
Material	PVC	Interply	PVC	Material	Fabric
Color	Petrol Green (PG)	Weft	Rigid (R)	Color	Fabric (FA)
Thickness	0.12in 3mm	Plies	3	Thickness	0in 0mm
Hardness ISO 868	55 Shore A	Fabric	Rigid (R)	Hardness ISO 868	-
Surface	Smooth - Shiny (L)			Surface	Bare (00)

*Because of continuous development above data is subjected to change without prior notice by Sampla. This data replaces that included in previous publications. Sampla excludes any liability for the incorrect use of the above stated information.

RELEASED 01/01/2019