


P9/A/BL

PUCON 2LR/6 LB13 U0/U03A AS FA

KD2LB1302

**TECHNICAL INFORMATION**

	IMPERIAL	METRIC
<b>Max Production Width</b>	125.98in	3200mm
<b>Total Thickness</b>	0.05in	1.3mm
<b>Mass</b>	0.29lb/ft <sup>2</sup>	1.4kg/m <sup>2</sup>
<b>Tensile force at 1% elongation (static)</b>	34lb/in Internal Method - ref. ISO 21181	6N/mm
<b>Working Temp.</b>	-13/+194F°	-25/+90C°
<b>Flexion (A)</b>	0.24in 6mm	
<b>Counter Flexion (B)</b>	0.31in 8mm	

**COEFFICIENT OF FRICTION** (bottom side) - **Steel** 0.2

**BEST USED FOR**

**GENERAL CHARACTERISTICS**

2 ply blue PU, knife edge suitable, Food Approved and antistatic

**RECOMMENDED USES**

Slider Bed | Flat Rollers | Conveyor with Accumulation | Slide Bed with Pressure | Bend Conveyor | Knife Edge Conveyor

**SPECIAL CHARACTERISTICS**

✓ **Food Approved, FDA compliance**  
 acc.to 21 CFR parts 170-19


✓ **Antistatic**  
 ISO 284 & 21178

✓ **Oil & Fat Resistant**

✓ **Food Approved, EU compliance**  
 (EC) No. 1935/2004 & (EU) No. 10/2011

✓ **Abrasion Resistant**

**BELT CONSTRUCTION INFORMATION**

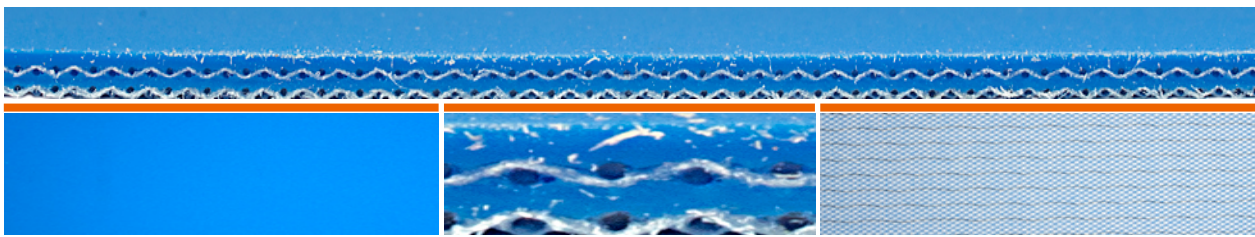

TOP SIDE (Carrying)		TENSION MEMBER		BOTTOM SIDE (Pulley)	
<b>Material</b>	PU	<b>Interply</b>	PU	<b>Material</b>	Fabric
<b>Color</b>	Light Blue (LB)	<b>Weft</b>	Rigid (R)	<b>Color</b>	Fabric (FA)
<b>Thickness</b>	0.01in 0.3mm	<b>Plies</b>	2	<b>Thickness</b>	0in 0mm
<b>Hardness</b> ISO 868	92 Shore A	<b>Fabric</b>	Light Rigid (LR)	<b>Hardness</b> ISO 868	-
<b>Surface</b>	Matte Finish (A)			<b>Surface</b>	PU Impregnated (U0)

\*Because of continuous development above data is subjected to change without prior notice by Sampla. This data replaces that included in previous publications. Sampla excludes any liability for the incorrect use of the above stated information.

RELEASED 01/01/2019