


T8/Z

PVCCON 1RX/6 B16 00/Z AS

KA1BL1601

TECHNICAL INFORMATION

	IMPERIAL	METRIC
Max Production Width	94.49in	2400mm
Total Thickness	0.06in	1.6mm
Mass	0.33lb/ft ²	1.6kg/m ²
Tensile force at 1% elongation (static)	34lb/in Internal Method - ref. ISO 21181	6N/mm
Working Temp.	+14/+158F ^o	-10/+70C ^o
Flexion (A)	0.79in 20mm	
Counter Flexion (B)	1.57in 40mm	

COEFFICIENT OF FRICTION (bottom side) - **Steel** 0.24

BEST USED FOR

GENERAL CHARACTERISTICS

2 ply black PVC with negative pyramid.
 Whisper weave. Antistatic.


RECOMMENDED USES

Slider Bed | Flat Rollers | Incline Conveying |
 Incline Variation | Slide Bed with Pressure

SPECIAL CHARACTERISTICS

- ✓ **Antistatic**
ISO 284 & 21178
- ✓ **Low Noise**

BELT CONSTRUCTION INFORMATION

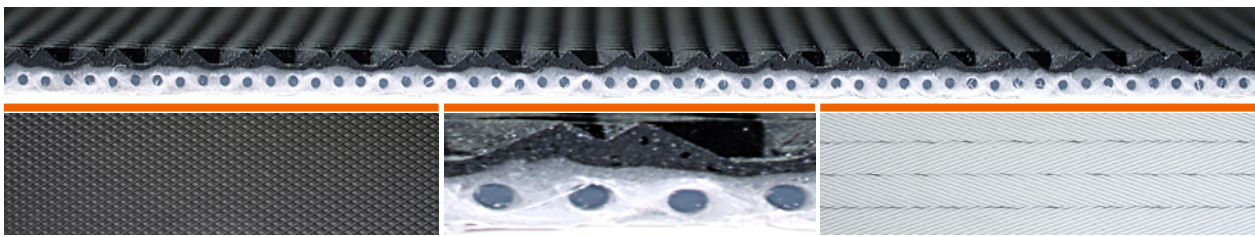

TOP SIDE (Carrying)		TENSION MEMBER	BOTTOM SIDE (Pulley)		
Material	PVC	Interply	-	Material	Fabric
Color	Black (B)	Weft	Rigid (R)	Color	Fabric (FA)
Thickness	0.04in 1mm	Plies	1	Thickness	0in 0mm
Hardness ISO 868	85 Shore A	Fabric	Rigid Whisper (RX)	Hardness ISO 868	-
Surface	Negative Pyramid (Z)			Surface	Bare (00)

*Because of continuous development above data is subjected to change without prior notice by Sampla. This data replaces that included in previous publications. Sampla excludes any liability for the incorrect use of the above stated information.

RELEASED 01/01/2019