


T8/E

PVCCON 1RX/6 B20 00/E AS

KA1BL2001

TECHNICAL INFORMATION

	IMPERIAL	METRIC
Max Production Width	94.49in	2400mm
Total Thickness	0.08in	2mm
Mass	0.33lb/ft ²	1.6kg/m ²
Tensile force at 1% elongation (static)	34lb/in Internal Method - ref. ISO 21181	6N/mm
Working Temp.	+14/+158F ^o	-10/+70C ^o
Flexion (A)	1.57in 40mm	
Counter Flexion (B)	2.36in 60mm	

COEFFICIENT OF FRICTION (bottom side) - **Steel** 0.24

BEST USED FOR

GENERAL CHARACTERISTICS

1 ply black PVC with inverted oval top.
 Whisper weave fabric. Antistatic.


RECOMMENDED USES

Slider Bed | Flat Rollers | Incline Conveying |
 Incline Variation | Slide Bed with Pressure

SPECIAL CHARACTERISTICS

- ✓ **Antistatic**
ISO 284 & 21178
- ✓ **Low Noise**

BELT CONSTRUCTION INFORMATION

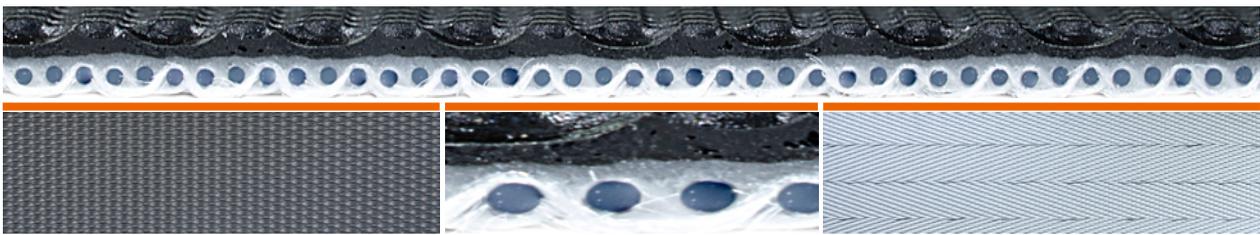

TOP SIDE (Carrying)		TENSION MEMBER		BOTTOM SIDE (Pulley)	
Material	PVC	Interply	PVC	Material	Fabric
Color	Black (B)	Weft	Rigid (R)	Color	Fabric (FA)
Thickness	0.04in 1mm	Plies	1	Thickness	0in 0mm
Hardness ISO 868	85 Shore A	Fabric	Rigid Whisper (RX)	Hardness ISO 868	-
Surface	Inverted Oval (E)			Surface	Bare (00)

*Because of continuous development above data is subjected to change without prior notice by Sampla. This data replaces that included in previous publications. Sampla excludes any liability for the incorrect use of the above stated information.

RELEASED 01/01/2019