


U14/06.06/Z/AG

PVCCON 2R/12 AG30 Z/V06 AS

KA2AG3001

TECHNICAL INFORMATION

	IMPERIAL	METRIC
Max Production Width	118.11in	3000mm
Total Thickness	0.12in	3mm
Mass	0.72lb/ft ²	3.5kg/m ²
Tensile force at 1% elongation (static)	68lb/in	12N/mm
	Internal Method - ref. ISO 21181	
Working Temp.	+14/+158F ⁰	-10/+70C ⁰
Flexion (A)	2.76in 70mm	
Counter Flexion (B)	3.54in 90mm	

COEFFICIENT OF FRICTION (bottom side) - **Steel** 0.35

BEST USED FOR

GENERAL CHARACTERISTICS

2 ply apple green PVC double cover.
 Smooth top and negative pyramid bottom


RECOMMENDED USES

Slider Bed | Flat Rollers

SPECIAL CHARACTERISTICS

- ✓ **Antistatic**
 ISO 284 & 21178

BELT CONSTRUCTION INFORMATION

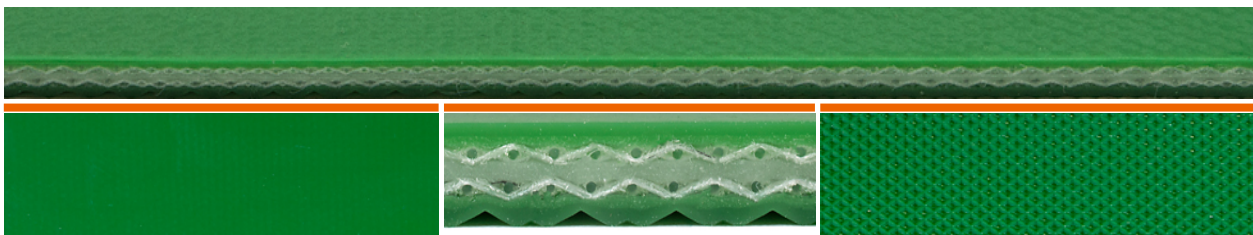

TOP SIDE (Carrying)		TENSION MEMBER		BOTTOM SIDE (Pulley)	
Material	PVC	Interply	PVC	Material	PVC
Color	Apple Green (AG)	Weft	Rigid (R)	Color	Apple Green (AG)
Thickness	0.02in 0.6mm	Plies	2	Thickness	0.03in 0.8mm
Hardness ISO 868	74 Shore A	Fabric	Rigid (R)	Hardness ISO 868	74 Shore A
Surface	Smooth - Shiny (┘)			Surface	Negative Pyramid (Z)

*Because of continuous development above data is subjected to change without prior notice by Sampla. This data replaces that included in previous publications. Sampla excludes any liability for the incorrect use of the above stated information.

RELEASED 01/01/2019